

6289975

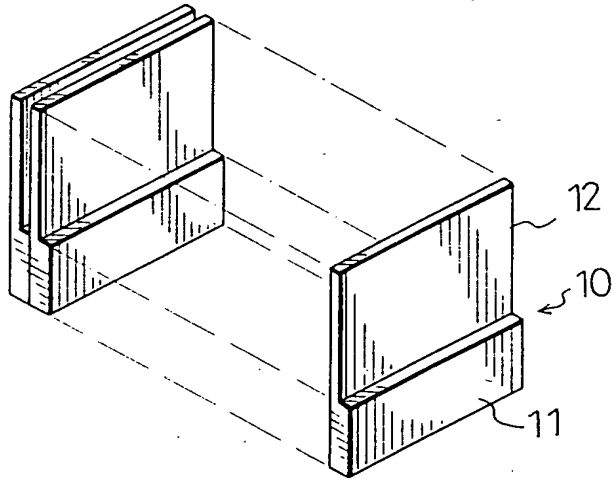


FIG. 1  
PRIOR ART

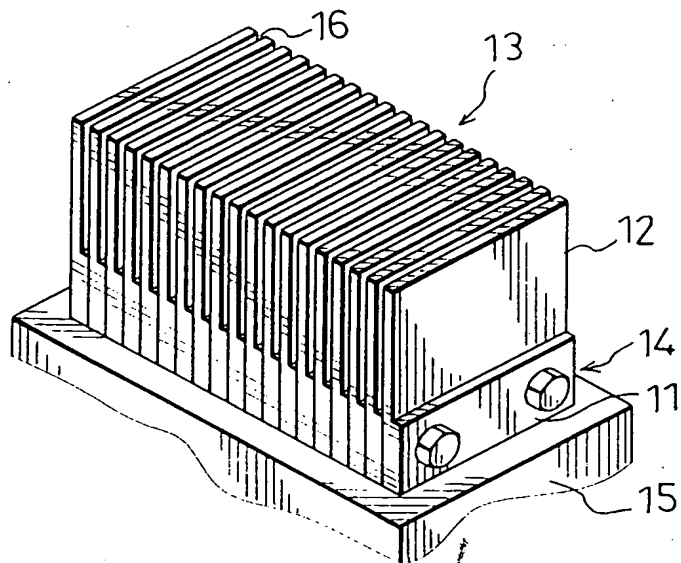


FIG. 2

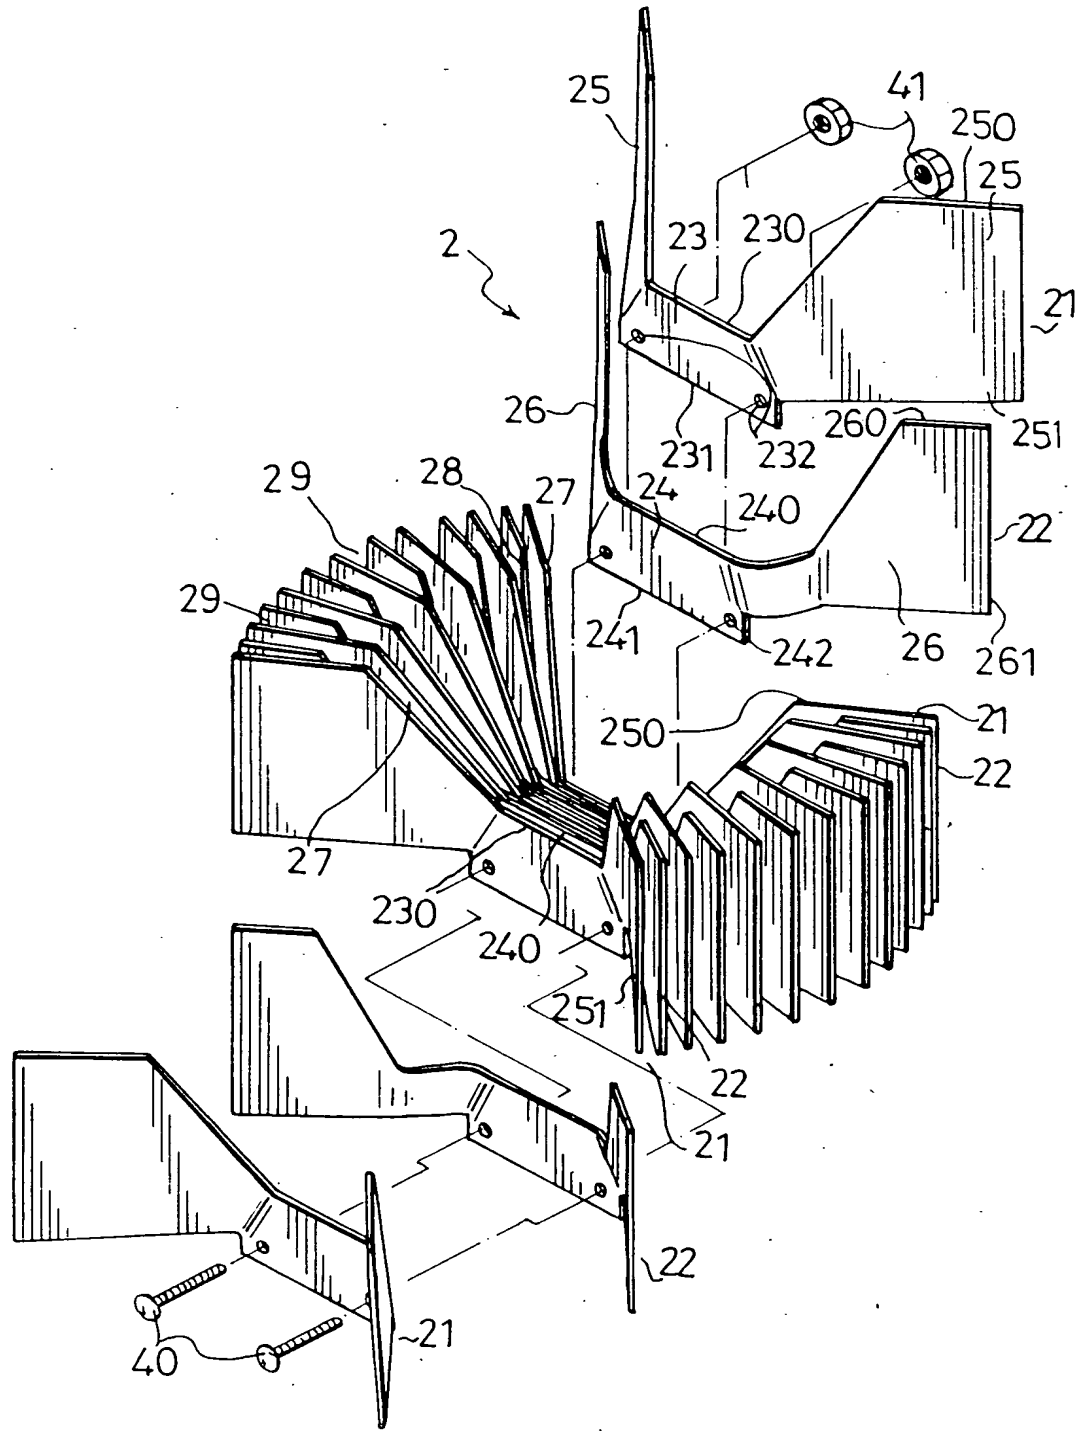


FIG. 3

This perspective view shows the overall assembly. On the left, a stack of plates 28 is shown, with one plate 27 being tilted upwards by a lever arm 23. The lever arm 23 is pivoted at its base 40 to a support structure 24. The right side of the device features another set of plates 21, which are held in place by a clamping mechanism consisting of a plate 22 and a series of bolts or pins 25. The entire assembly is supported by a base 26.

FIG. 4

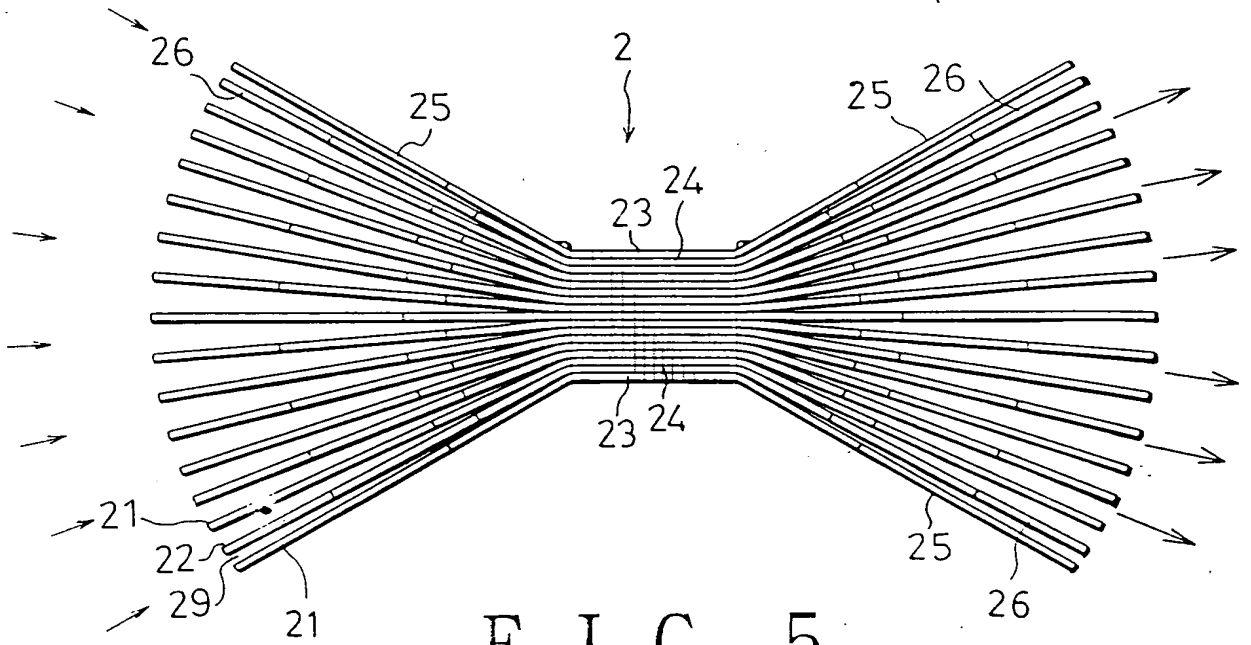


FIG. 5

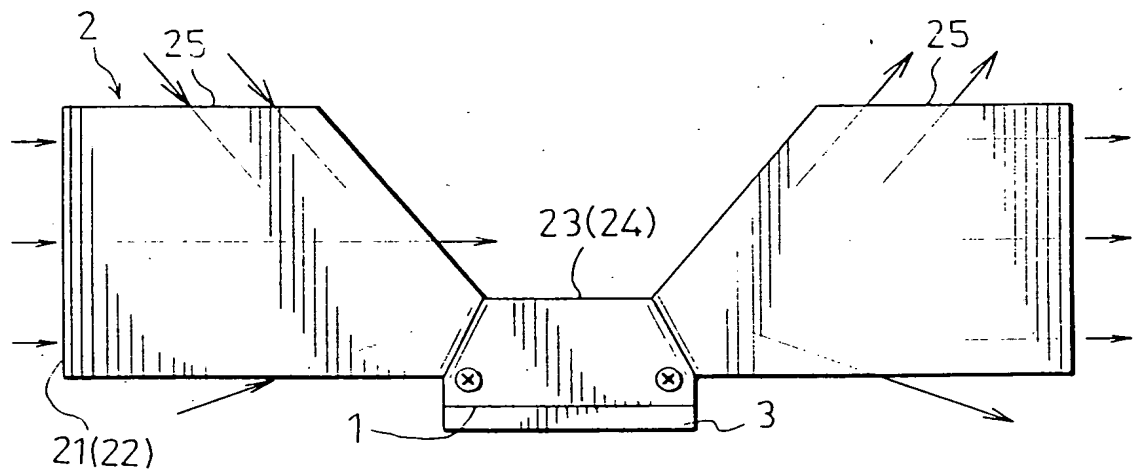


FIG. 6

FIG. 7 of 340353

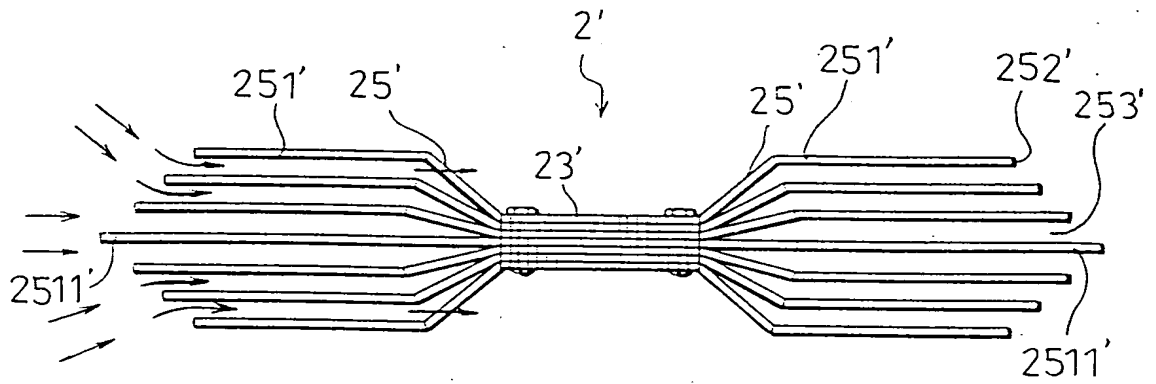


FIG. 7

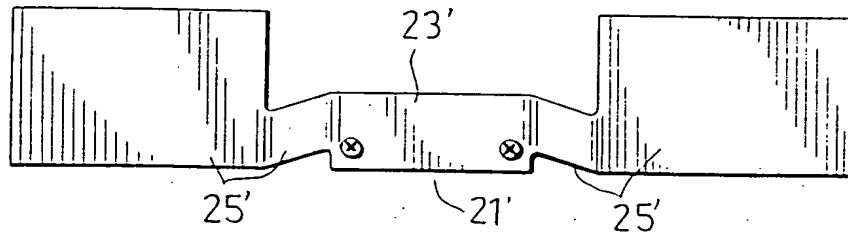


FIG. 8

FIG. 9 of 10



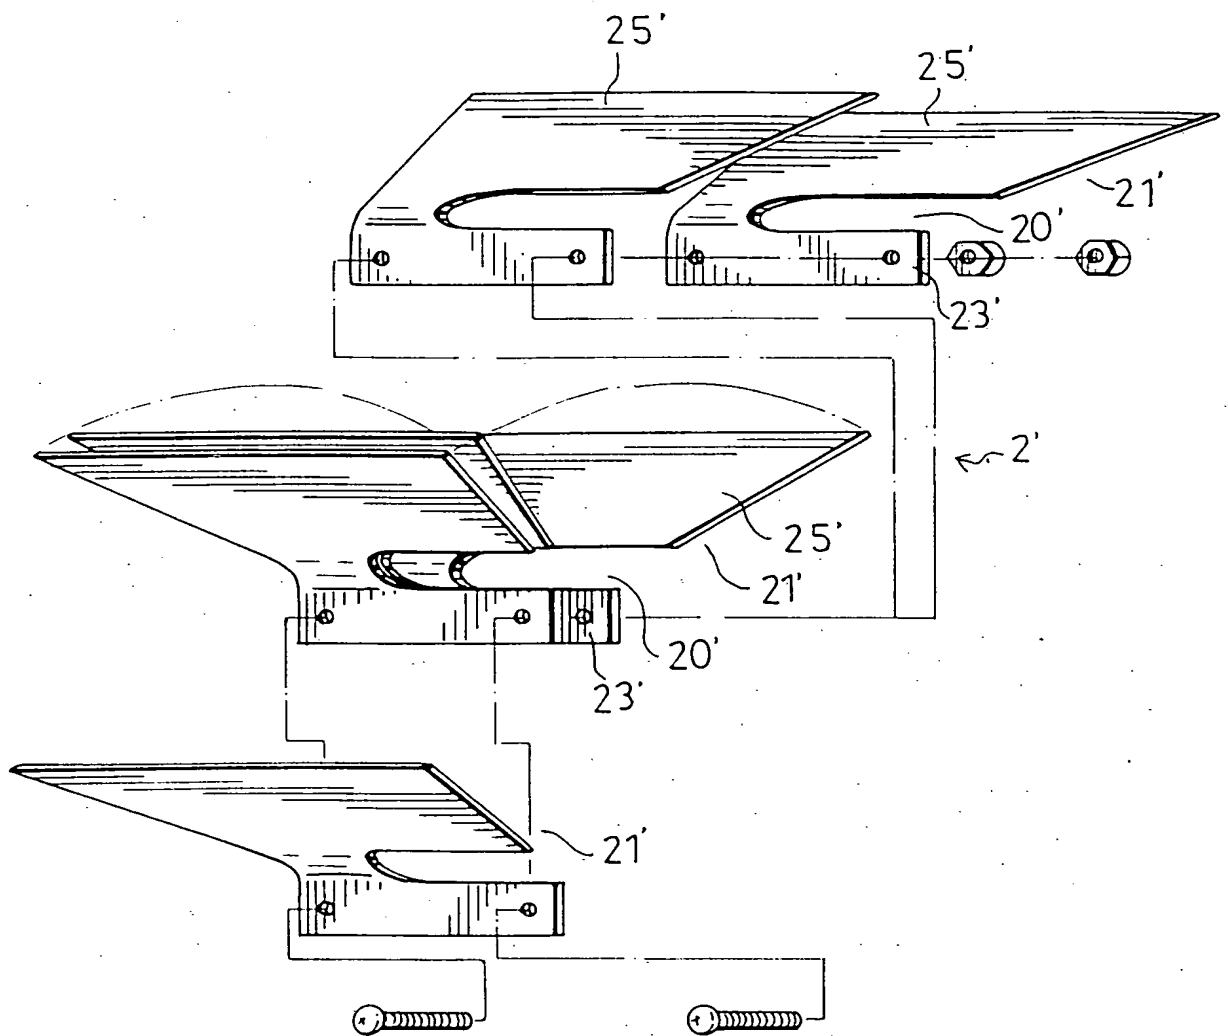


FIG. 9

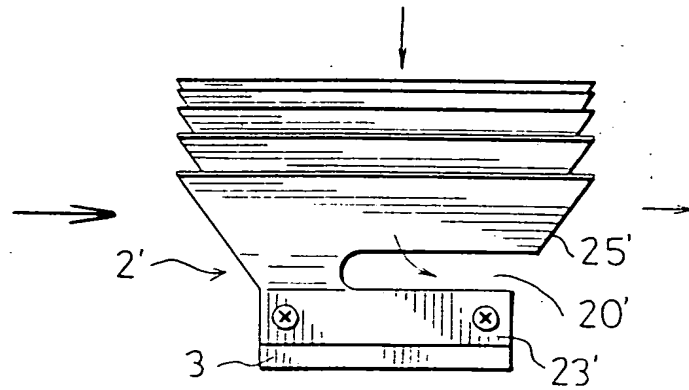

F I G. 10

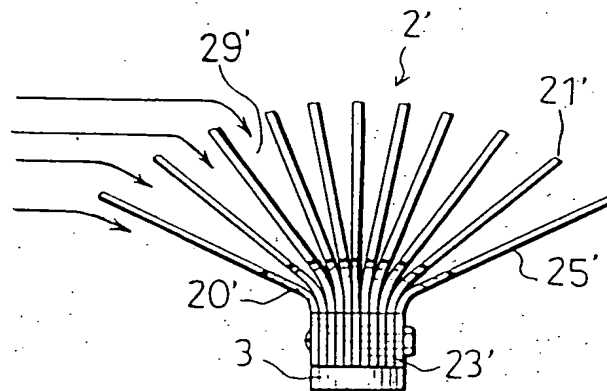

F I G. 11

FIG. 12

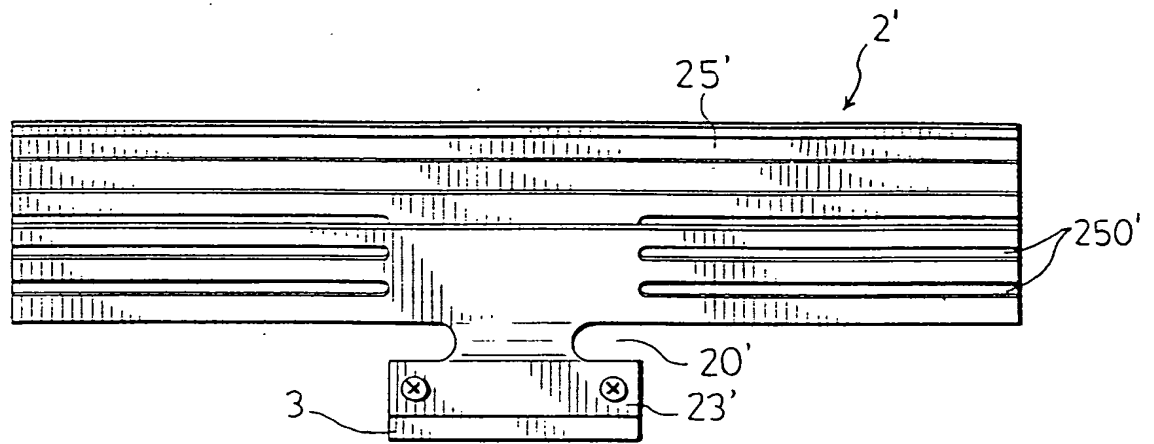


FIG. 12

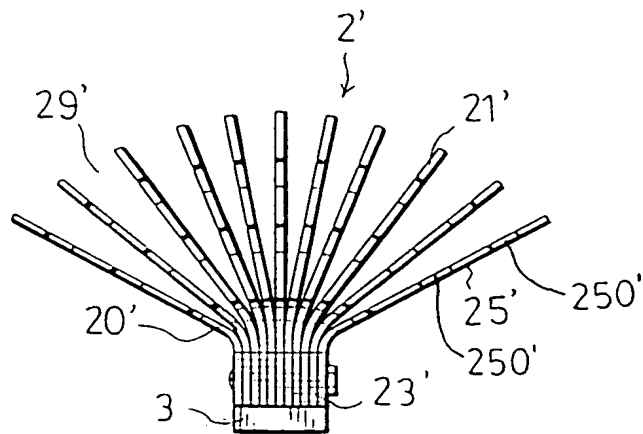


FIG. 13





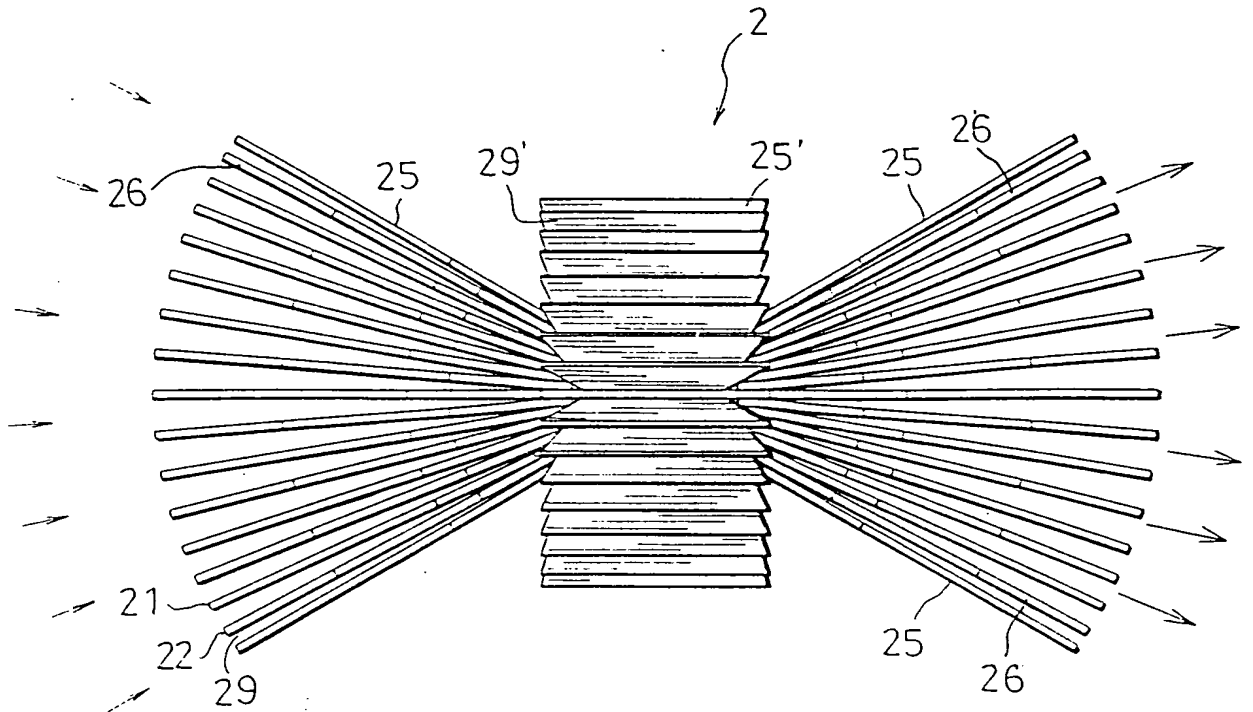


FIG. 15

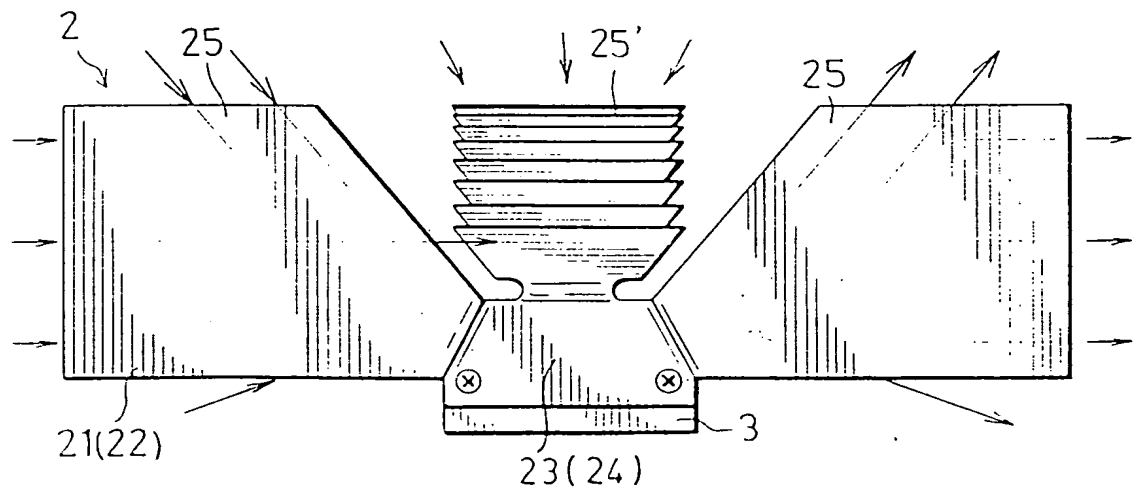


FIG. 16

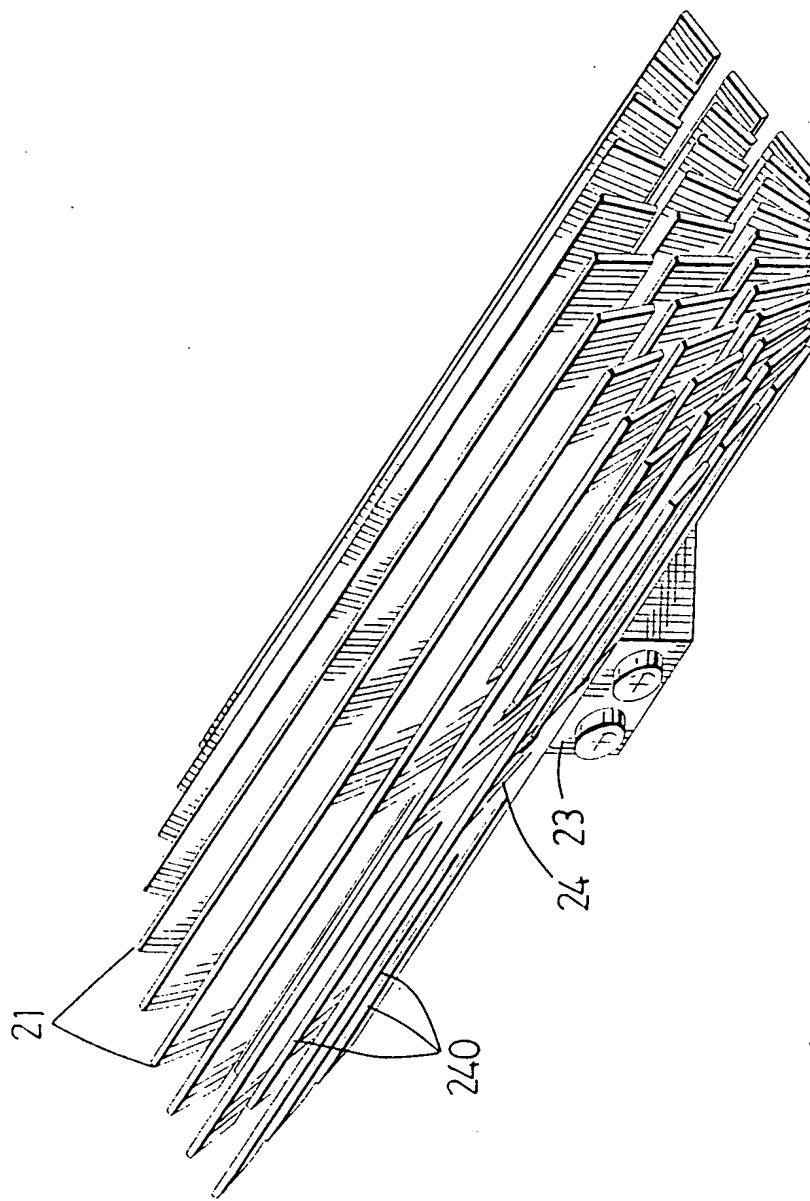


FIG. 17



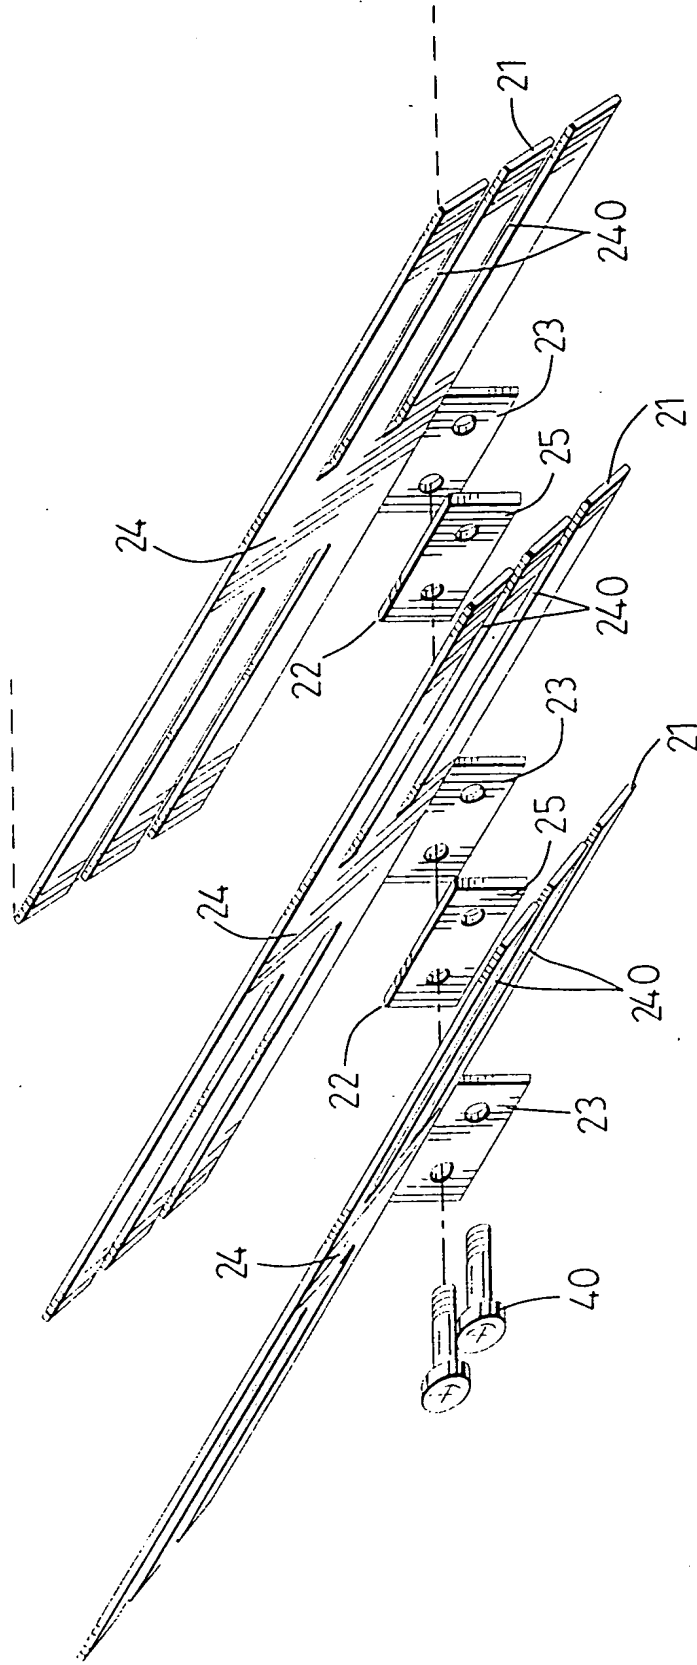


FIG. 18

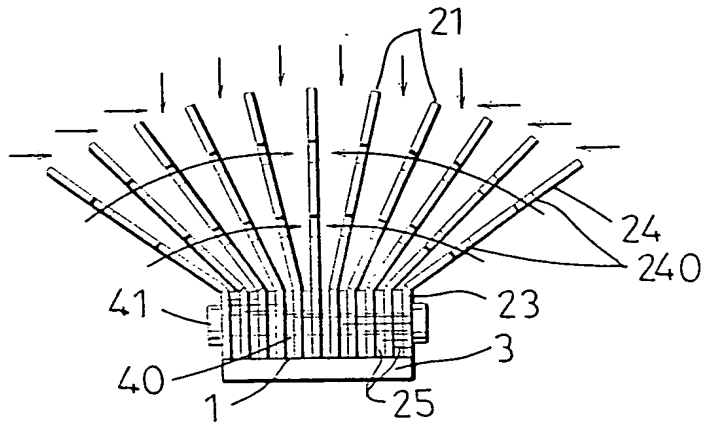

F I G. 19

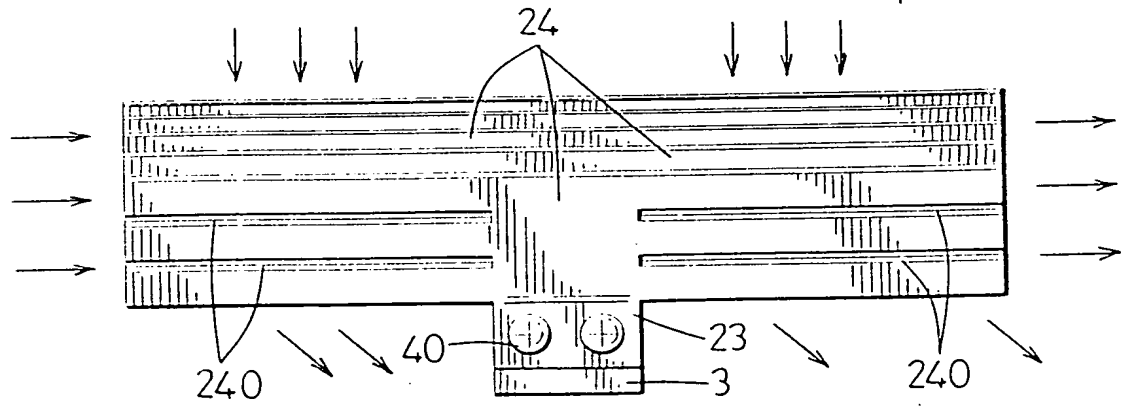

F I G. 20


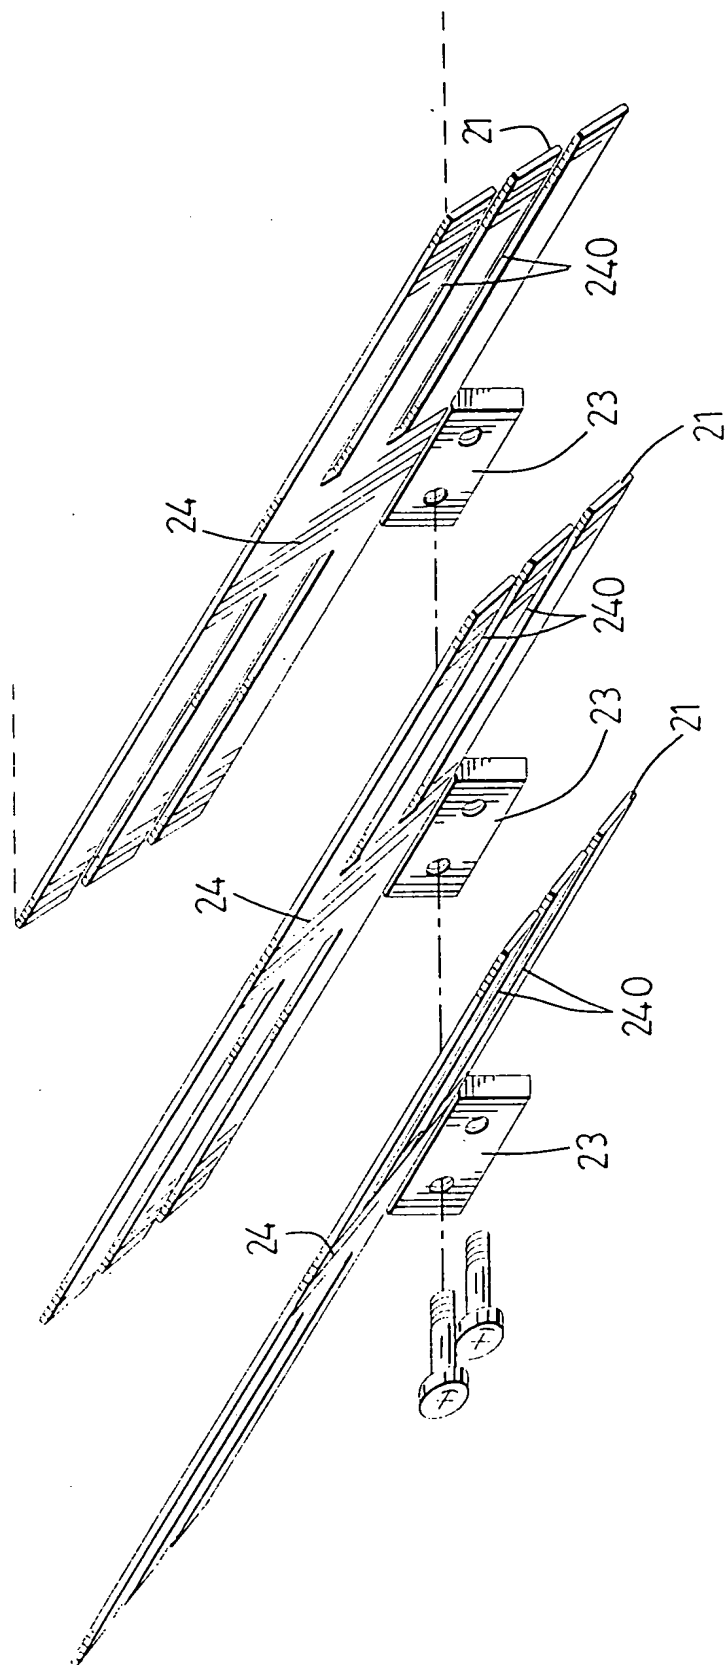


FIG. 21

Patented Oct 20 1903

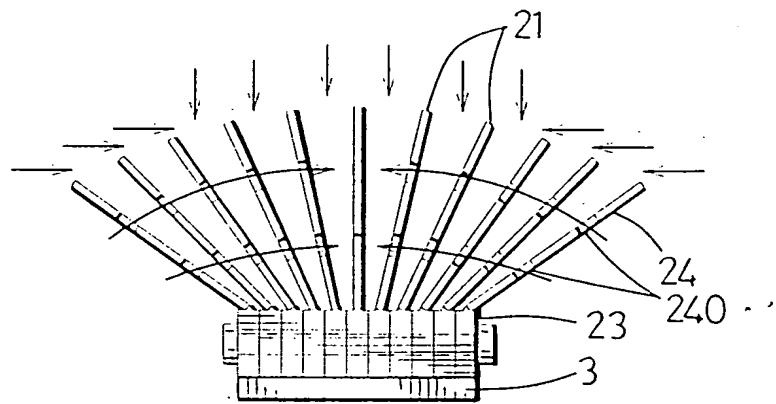

F I G. 22